


## Model B timestep = 6

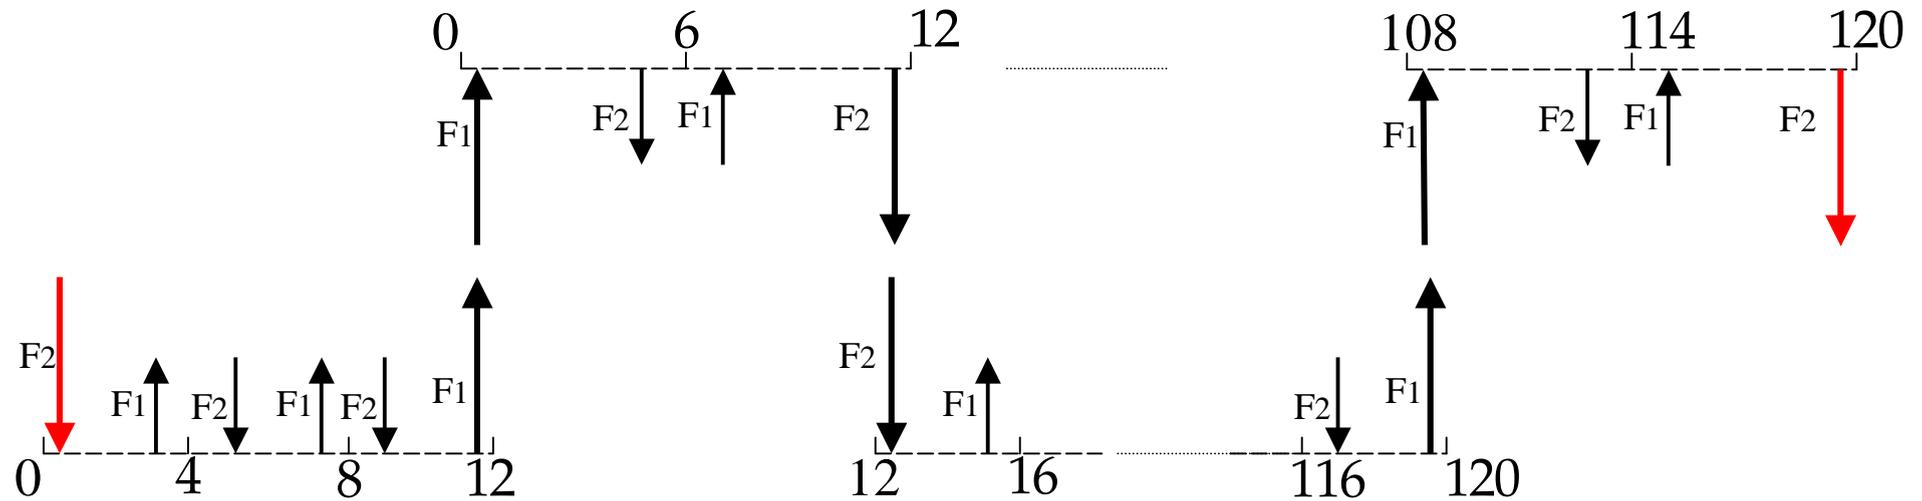

## Model A timestep = 4

$Cpl\_period(F_1) = 12$ $Cpl\_period(F_2) = 12$ $LAG(F_1) = -8$ $LAG(F_2) = 6$ $SEQ(F_1) = 2$ $SEQ(F_2) = 1$
---

- prism\_put\_proto/prism\_get\_proto leading to writing/reading to/from coupling restart file
- prism\_put\_proto/prism\_get\_proto leading to sending/receiving actions
- prism\_put\_proto/prism\_get\_proto not leading to sending/receiving actions